
SELOYLIVE SHADE

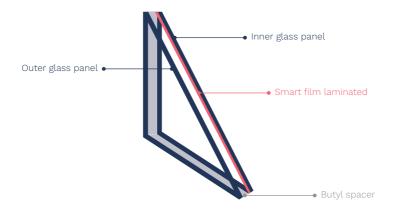

SELOY LIVE SHADE - PRODUCT RANGE

SELOY LIVE SHADE - PRODUCT RANGE	
PRODUCT	NOTE
SHADE customized size	Glass options and sizes up to 2900 x 5700 mm
Option - Dimmer	
Option - Remote control	
Option - Projection foil	
Option - Alternative colors	gray, dark gray, blue, pink, yellow, green
Option - Touch sensor	Max size 1308 x 2325 mm (105")

PC/media player is not included in the scope of delivery.

SELOY LIVE SHADE TECHNICAL DATA SHEET

FUNCTIONAL SPECIFICATIONS	
Shade color	white, opaque (optional colors available)
UV block	>99 %
IR block	>90 %
Operating temperature	-10 °C - +60 °C
Parallel light transmittance (650nm)	~96 % (on) ~3 % (off)
Total light transmittance	~90 % (on) ~5 % (off)
Haze	~4 % (on) ~85 % (off)
Operating voltage (separate power supply included)	0-75 VAC
Power consumption	3-4 W / m2
Switching speed	ON max 100 ms OFF max 300ms
Operation logic	Power on: Transparent / Power off: Opaque
Optional add on	dimmer, remote controller (on/off), touch sensor

MECHANICAL SPECIFICATIONS	
Max size (glass)	2900 x 5700 mm
Thickness	18 mm (2x6 mm glass + 6 mm gap)
Weight	~25 kg / m2
Standard glass	Tempered, no coatings
Optional glass	float, anti reflective, optically clear, sound reducing, thermal, fire rated, security
Standard treatments	edges grinded and polished, corners blunted
Optional treatments	silk printed masking, sandblasting