
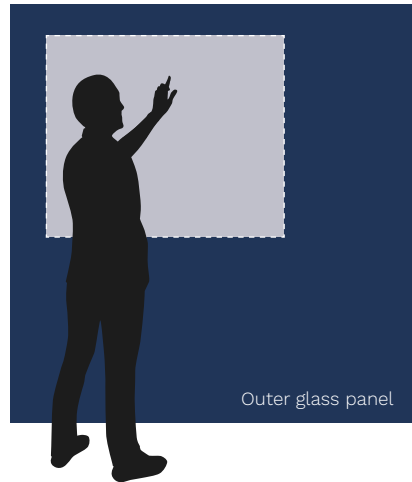


SELOYLIVE SHINE

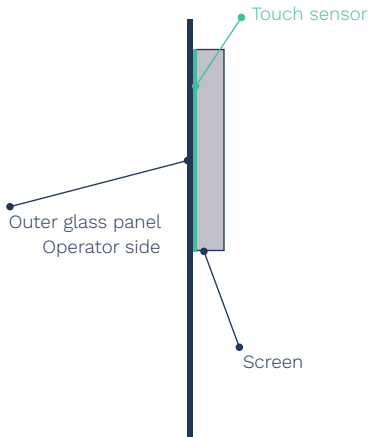

SELOY LIVE SHINE - PRODUCT RANGE

SCREEN	GLASS
LCD 42"	1080 x 673 mm
LCD 49"	1234 x 761 mm
LCD 55"	1367 x 836 mm
Custom size videowall, max touch size 105"	up to 3100 x 2400 mm

PC/media player is not included in the scope of delivery.

SELOY LIVE SHINE - TECHNICAL DATA SHEET

SCREEN SPECIFICATIONS

Thickness (screen)	32 mm
Resolution	1920 x 1080 px
Brightness (screen without mirror)	700 nits
Ports	HDMI, DP, DVI, VGA, audio (in/out), serial (in/out), external remote
Audio amplifier	20 W
Operating voltage	120 / 230 VAC 50 / 60 Hz
Power consumption, sleep/max	0,7 W / 110-140 W
Usage	24 h / 7 d
Weight	12,5 kg / 42" - 21 kg / 55"
Operating temperature	0-40 °C
Options	SOUND embedded to glass

TOUCH SPECIFICATIONS

Touch principle	projected capacitive
Number of touch points	40 simultaneous, 100 as an option
Response time	5 ms
Touch accuracy	0,53 % of touch area diagonal (option 0,26 %)
Finger separation	2,64 % of touch area diagonal (option 1,30 %)
Software and drivers	Windows 10,8,7, Ubuntu 12.04, Linux, Android, Chrome OS, MAC OSX
Interface	HID
Data connectivity	USB 2.0
Power consumption, depending on touch points	5 V, 220 mA (410 mA option)

GLASS SPECIFICATIONS

Thickness	6 mm
Size	150 mm larger than screen as standard
Custom sizes	max 3100 x 2400 mm
Type	Non-tempered as standard
Glass finishing	Silk printed masking, edges grinded and polished, corners blunted
Options	Tempered glass, custom glass sizes